

New from

RadonAway™

Introducing the Most Technologically Advanced
Waterborne Radon Removal System in the World



EZ Does It!

- ✓ *Easy to Install*
- ✓ *Easy to Maintain*
- ✓ *Easy on the Eyes*
- ✓ *Easy on the Wallet*

The AIRRaider EZ⁹⁵ provides everything you and your customer ever wanted in a water aeration system.



Good things come in small packages
The EZ⁹⁵'s low profile and small footprint can fit into tight spaces.

Looks aren't everything ~ but they do count
The compact EZ⁹⁵ with fully integrated repressurization pump is easily the best-looking water aeration system available.

Silence is not always golden
The EZ⁹⁵ works quietly and effectively – but makes itself heard when necessary. An audible alarm will sound if the water level is too high or if the aeration process is interrupted.

You can buy peace of mind
The EZ⁹⁵ reduces the radon level by up to 95%+ ... at a remarkably low price.

800-767-3703

Your job just got EZ!

Negative Pressure

The EZ⁹⁵'s unique design maintains a negative pressure to assure avoidance of radon leakage into the living area.

Fail Safe

An audible alarm warns of potential flooding by sounding if the water level is too high; the alarm also sounds if the aeration process is interrupted.

No Sweat

The EZ⁹⁵, unlike its competitors, has a double-wall foam-insulated tank that will not "sweat."

Small and Compact


At just over 3 1/8 feet high, 2 1/2 feet wide and 2 2/8 feet long, the EZ⁹⁵ is unobtrusive and fits into tight spaces. Can be shipped via UPS.

Effective

The EZ⁹⁵ is small in size but big in effectiveness, achieving up to 95%+ radon reduction at up to 10gpm flow rate.

Total Package

The EZ⁹⁵'s fully integrated internal repressurization pump makes installation easy. No external pump or tank necessary!

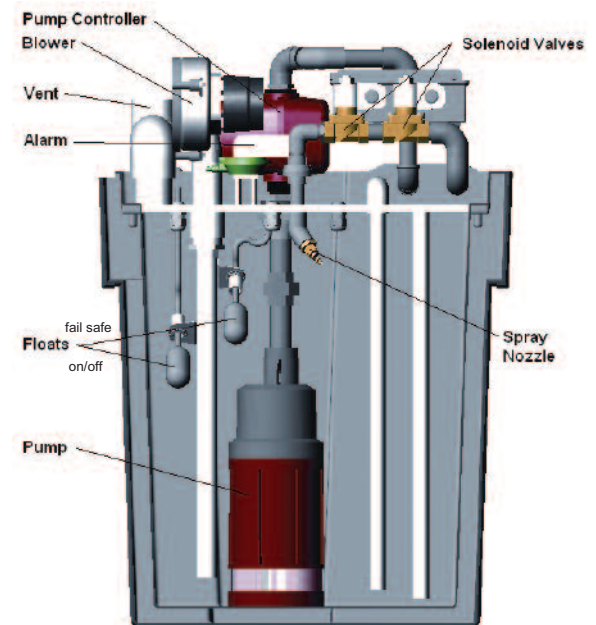

Blower:	High Flow 20000 RPM 0.21HP 800 Watt 115VAC/5.7 Amp	Radon Reduction:	Up to 95%+
Pump:	1 HP 1100 Watt 115VAC/9.8 Amp Thermally Protected Submersible	Water Inlet/Outlet Connections:	3/4" MNPT
Pump Controller:	Computerized Control and Protection System for constant pressure and capacity tankless systems. Integral Dry Running Fuse and Non-Return Valve. Protection IP44	Air Outlet:	2" PVC Pipe Female Socket (Solvent Cement)
Air Alarm:	5 Amp SPDT Pressure Switch with 120 VAC/0.04 Amp Buzzer	Air Inlet:	Via Vent Grille and Filter/Silencer
Solenoid Valves:	Normally Closed Metal Housed Class F120 VAC Buna N Seal Brass Valve Body 3/4" NPT.	Tank:	Double Wall Insulated NSF Rated for Potable Water FDA-approved polyethylene
System Voltage:	115VAC	Tank Dimensions:	27.62" H x 25.17" W x 25.23" L
Electric Supply:	20 Amp 115VAC Dedicated Circuit	Tank Operating Capacity:	27 Gallons (Total Internal Volume 41 gallons)
Recommended Flow:	Up to 7 GPM	Overall Dimensions:	36.37" H x 25.65"W x 25.71" L
		Pipe:	CPVC NSF Rated for Potable Water

- Listed Water Treatment Appliance Certification Pending
- Certified as Conforming to UL979 Standard for Water Treatment Appliances

Dealer:

800-767-3703

RadonAway
Ward Hill, MA
www.radonaway.com

AIRRaider™
EZ⁹⁵
Diffused Bubble Aeration Systems